



# TYPE-A

RIFLE COMPANY



## SIPR/16 SPECIFICATIONS

<b>BARREL LENGTH:</b>	16.0"
<b>BARREL PROFILE:</b>	TYPE-A NATO M4 CONTOUR
<b>BARREL PROFILE:</b>	41V50 VANADIUM/QPQ
<b>TWIST RATE:</b>	1:7
<b>GAS SYSTEM:</b>	CARBINE (5.56)/PISTOL (300BLK)
<b>MUZZLE:</b>	SILENCERCO ASR BRAKE
<b>TRIGGER GROUP:</b>	TYPE-A CCS 2-STAGE
<b>BOLT CARRIER GROUP:</b>	TYPE-A QPQ W/R.E.M. POLISH
<b>FIRE SELECTOR</b>	AMBI SHORT THROW ADJUSTABLE
<b>CHARGING HANDLE:</b>	TYPE-A AMBI RAPTOR-LT
<b>RAIL SYSTEM:</b>	TYPE-A SIPR/15 GEN3 M-LOK
<b>OVERALL LENGTH:</b>	33.0" OAL (83.8CM)
<b>WEIGHT (UNLOADED):</b>	6.56 LBS. (2.79 KG)
<b>CALIBER:</b>	5.56 NATO OR 300BLK
<b>MAGAZINE:</b>	MAGPUL PMAG 30 ROUND
<b>CASE:</b>	36" DRAGO SINGLE RIFLE BAG
<b>MFG PART NUMBER:</b>	TS355616C-COLOR TS330016C-COLOR

### AVAILABLE COLORS:

MIL-A-8625 TYPE-III CLASS 2	H-267 MAGPUL FDE	H-231 MAGPUL ODG	H-189 BAZOOKA GREEN	H-237 TUNGSTEN	H-210 DARK GREY
-----------------------------------	---------------------	---------------------	------------------------	-------------------	--------------------



\*ADDITIONAL COLORS AVAILABLE  
\*SHOWN IN TUNGSTEN (H-237)



WWW.TYPEARIFLES.COM

@BGDEFENSE/@TYPE\_A\_RIFLE

# WHY.....

# TYPE-A

RIFLE COMPANY

## REAR END

### BUFFER SYSTEM

- \* 6-POSITION BUFFER TUBE
- \* CONSTRUCTED FROM 6061-T6 AIRCRAFT ALUMINUM
- \* CARBINE BUFFER SPRING MIL-SPEC
- \* H1 BUFFER

### END PLATE

- \* TYPE-A QD SINGLE POINT PLATE

## TRIM

### FURNITURE

- \* MAGPUL MOE SL-K STOCK
- \* MAGPUL MOE K2+ GRIP

### PACKAGING

- \* DRAGO 36" SOFT CASE

## POWERTRAIN

### BOLT CARRIER GROUP

- \* ENHANCED QPQ COATING W/R.E.M. POLISH
- \* INCREASED LUBRICITY, FRICTION REDUCTION, AND EASY CLEANING
- \* GAS KEY - HARDENED & HYDRAULICALLY STAKED
- \* BOLT - CASE HARDENED, SHOT PEENED, AND MPI TESTED


### CHARGING HANDLE

- \* TYPE-A RAPTOR LT CHARGING HANDLE

## FINISH

### BASE LAYER

- \* MIL-A-8625, TYPE-III, CLASS 2 HARDCOAT ANODIZED TOP LAYER
- \* H SERIES CERAKOTE

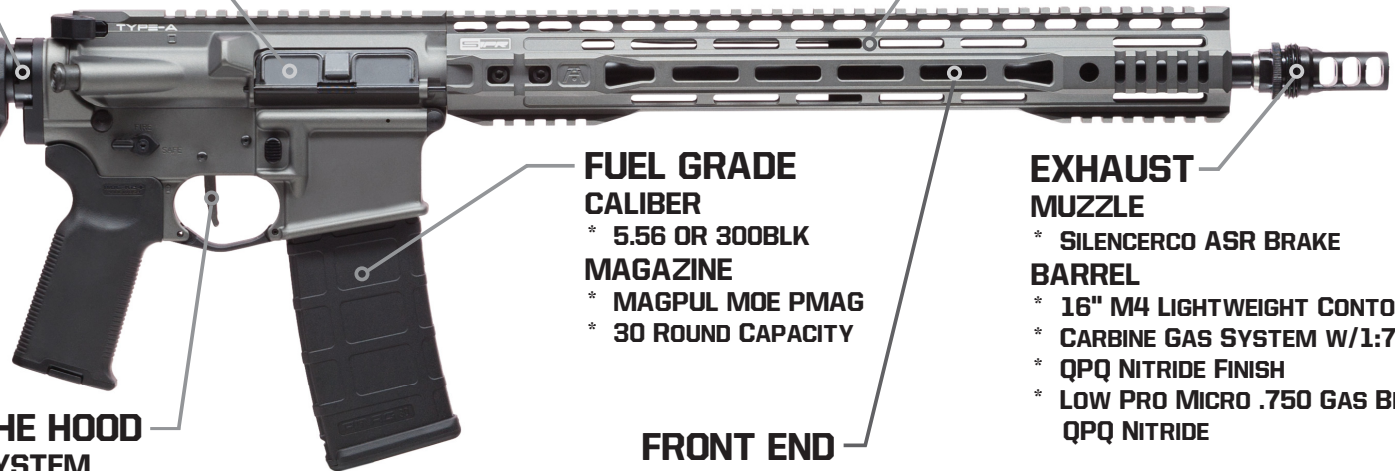

## FUEL GRADE CALIBER

- \* 5.56 OR 300BLK

## MAGAZINE

- \* MAGPUL MOE PMAG
- \* 30 ROUND CAPACITY

## EXHAUST MUZZLE

- \* SILENCERCO ASR BRAKE

## BARREL

- \* 16" M4 LIGHTWEIGHT CONTOUR
- \* CARBINE GAS SYSTEM W/1:7 TWIST
- \* QPQ NITRIDE FINISH
- \* LOW PRO MICRO .750 GAS BLOCK
- \* QPQ NITRIDE

## UNDER THE HOOD

### TRIGGER SYSTEM

- \* TYPE-A CCS 2-STAGE STRAIGHT TRIGGER
- \* CHROMIUM BILLET CONSTRUCTION
- \* FLUTED SLOTS FOR FINGER CONTROL
- \* 1 1/2 LB. TO 3 1/2 LB. PULL (ADJUSTABLE UPON REQUEST)

### LOWER COMPONENTS

- \* TYPE-A AMBI ADJUSTABLE SHORT THROW - 45/90 DEGREES
- \* TYPE-A EXTENDED MAG RELEASE
- \* STAINLESS STEEL DETENTS, SPRINGS, TRIGGER PINS, ETC.

## FRONT END HANDGUARD

- \* SIPR/15 GEN3 M-LOK ULTRA LITE HANDGUARD
- \* FLAT TOP PICATINNY RAIL FOR DETACHABLE OPTICS/SIGHTS
- \* DETACHABLE M-LOK PICATINNY RAIL INSERTS - 360 DEGREES
- \* CONSTRUCTED FROM 6061-T6 AIRCRAFT ALUMINUM
- \* QD SLING POINT READY - FRONT
- \* APPROX. 11.7 OZ.